


SERVOCUT 602 Troncatrice Automatica e Motorizzata

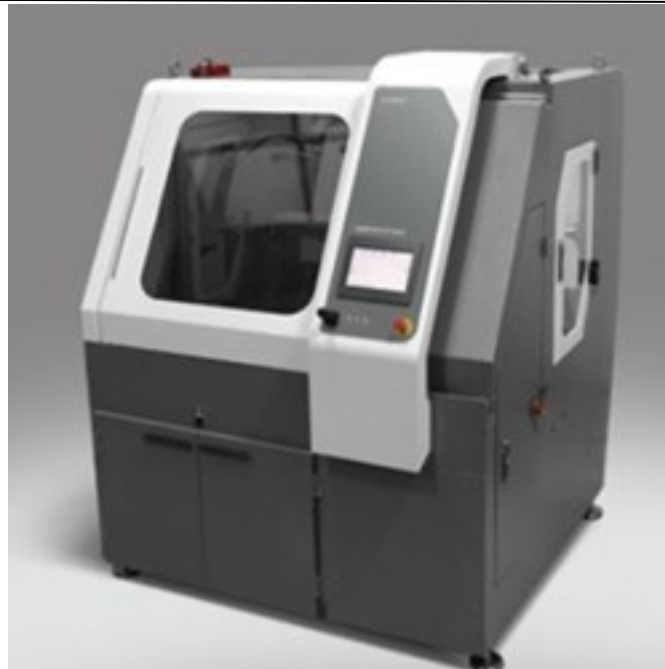

Model	602	602-AX
Max. Cut-off Wheel Diameter	Ø600 mm	Ø600 mm
Max. Cutting Capacity, Ø	Ø225 mm	Ø225 mm
Max. Cutting Capacity, HxD	100×500 mm	100×500 mm
Z-Axis Travel, (mm)	340 mm	340 mm
Y-Axis Travel, (mm)	560 mm	560 mm
X-Axis Travel, (mm)	–	540 mm
T-Table Dimension, (mm)	772×710 mm	772×710 mm
T-Slot dimension, (mm)	12 mm	12 mm
Cutting Motor Power (S1)	15 kW	15 kW
Variable Wheel Speed	600-2400 RPM	600-2400 RPM
Wheel Diameter Measurement	Standard	Standard
Constant Peripheral Wheel Speed	Standard	Standard
Cutting Feedrate, (µm/s)	20-5000 µm/s	20-5000 µm/s
HMI Touch Screen Controller	10 inch	10 inch
Chop Cutting in Z- Axis	Auto	Auto
Table Feed Cutting in Y-Axis	Auto	Auto
Parallel Cutting in X-axis	–	Standard
Multi Target Cutting	–	Standard
Table Oscillating Cutting	Standard	Standard

Rapid Pulse Cutting	Standard	Standard
Smart Feed Control	Standard	Standard
StepCut; SegmentCut; Diagonal-Cut	Optional	Optional
Automatic Cleaning System	Optional	Optional
Central Lubricating System	Optional	Optional
Size, WxDxH, (cm)	184x173x236	184x173x236
Weight	1600 kgs	1600 kgs
Recirculation Cooling Uni	200 lt	200 lt